
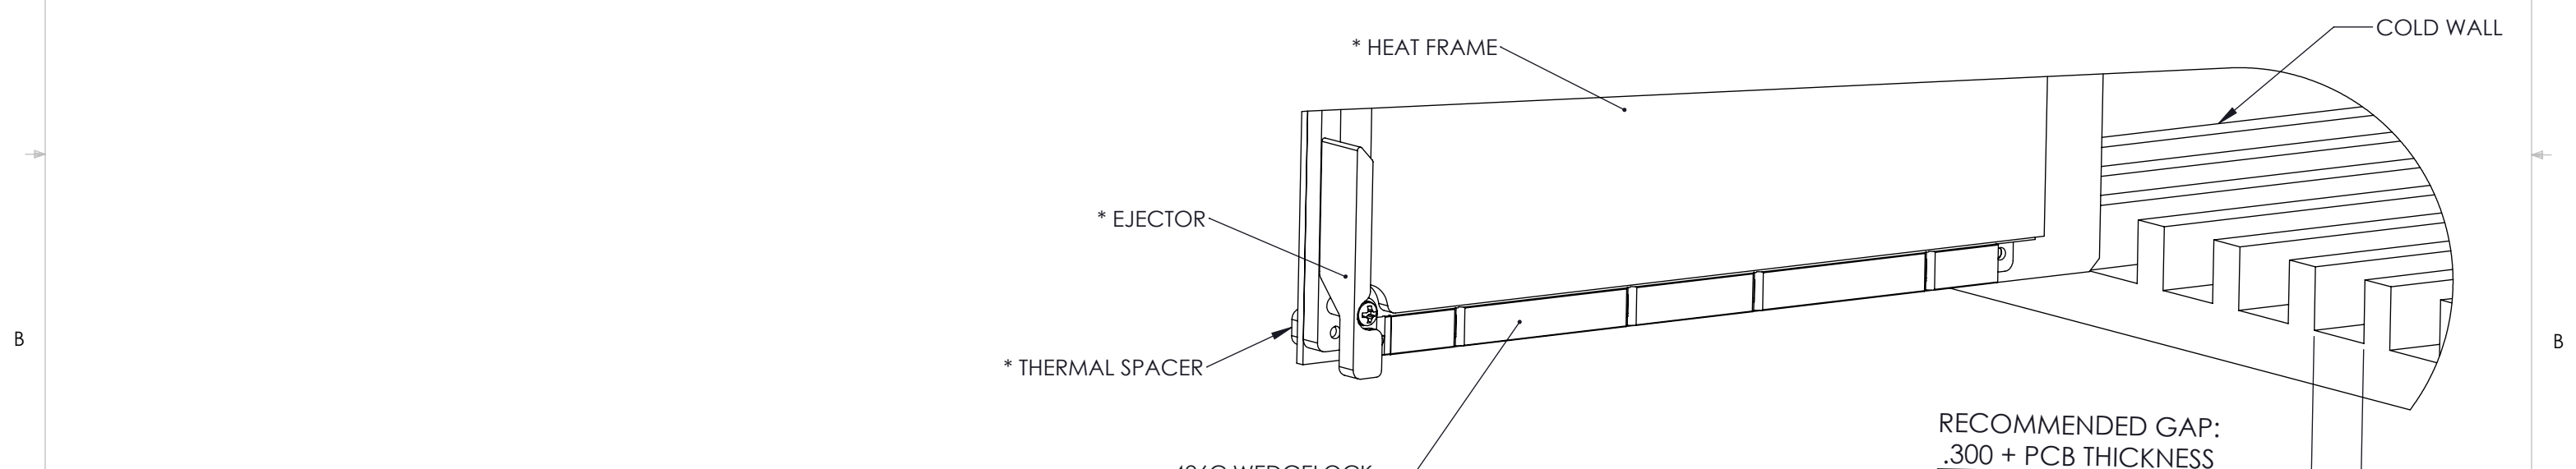


8 7 6 5 4 3 2 1

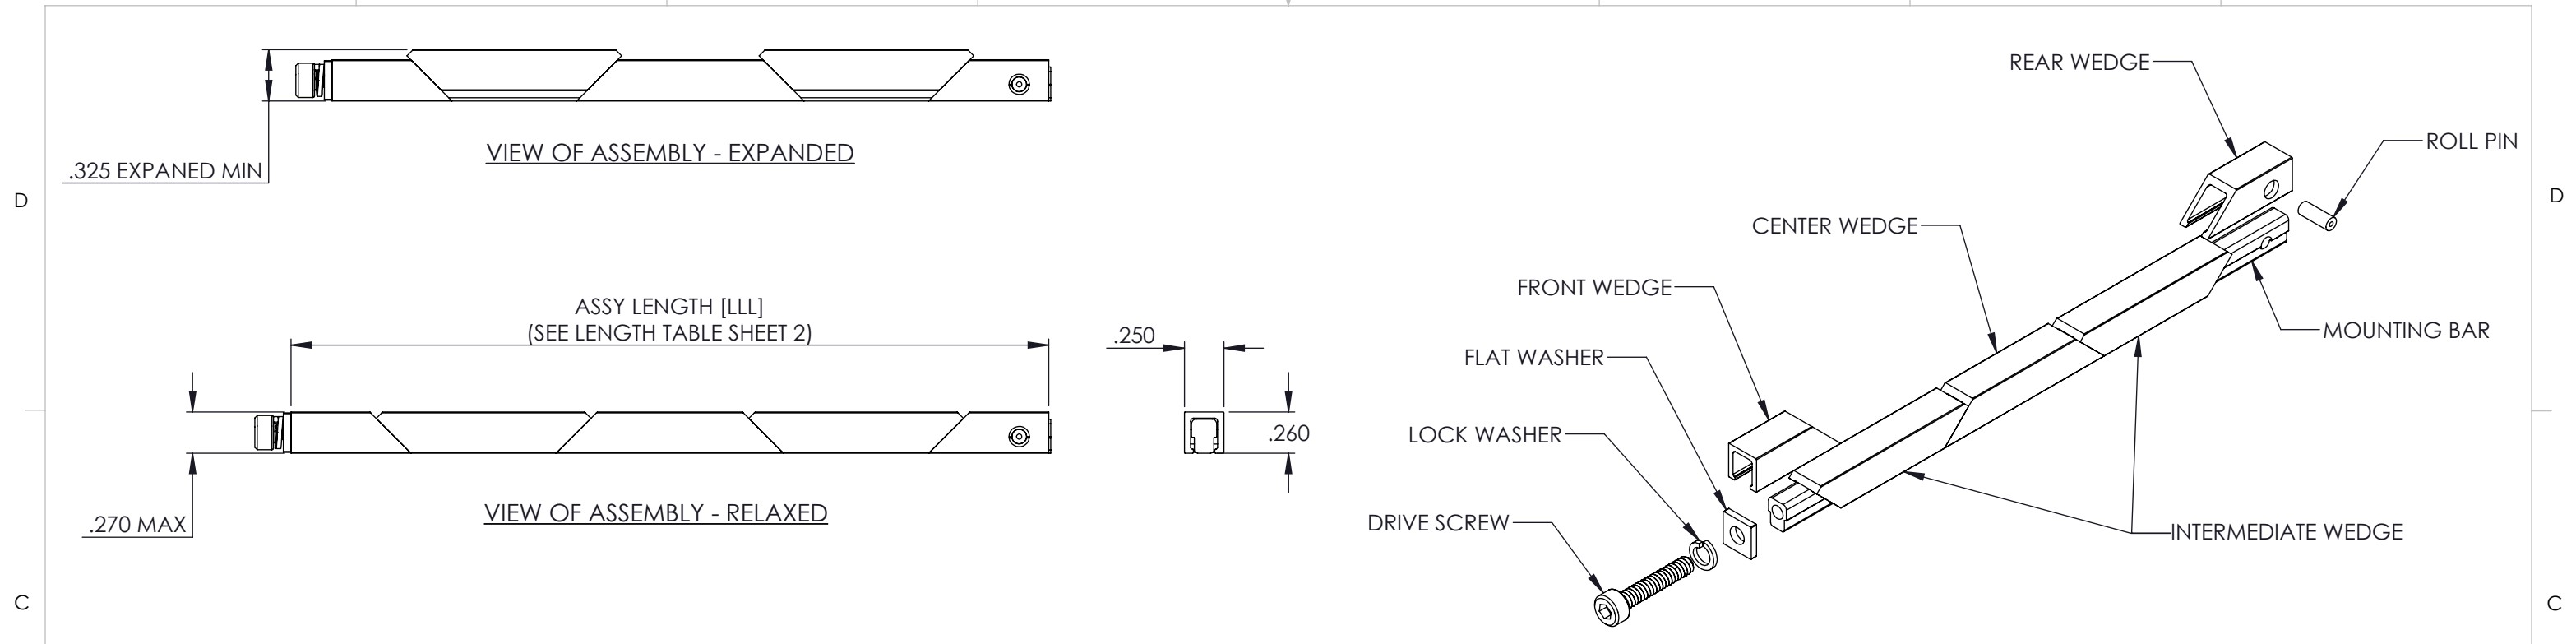

- FEATURES**
- DESIGNED FOR HEAVY SHOCK AND VIBRATION.
 - UNIFORM CLAMPING FORCE AND HIGH THERMAL TRANSFER.
 - NARROW WIDTH FOR MAXIMUM PCB COMPONENT AREA.
 - LOW PROFILE DESIGN ALLOWS FOR DECREASED SLOT PITCH.
 - CAPTIVATED REAR WEDGE.
 - LIGHT WEIGHT = ASSEMBLY LENGTH X .085 OZ [2.41 G] OR [.95 G/CM]
 - SPECIAL LENGTHS, FINISH, AND OTHER DESIGN OPTIONS AVAILABLE UPON REQUEST.

MATERIAL
 MOUNTING BAR AND WEDGES: ALUMINUM 6063-T6.
 ALL OTHER HARDWARE: STAINLESS STEEL, PASSIVATED.

PARTS ARE SHIPPED AS COMPLETE ASSEMBLY EXCEPT FOR RIVET MOUNT OPTION (SEE SHEET 2)
 RECOMMENDED DRIVE SCREW TORQUE IS 6 IN-LBS (68 N-CM)

* CONTACT WAKEFIELD FOR COMPLETE HEATFRAME ASSEMBLY OR OTHER COMPONENT ITEMS

THIS DOCUMENT, IN ITS ENTIRETY, CONTAINS INFORMATION WHICH IS CONFIDENTIAL AND PROPRIETARY TO WAKEFIELD THERMAL. DOCUMENTS MARKED WITH PROPRIETARY ARE NOT TO BE USED, DUPLICATED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION OF AN OFFICER OR DULY AUTHORIZED REPRESENTATIVE OF WAKEFIELD THERMAL OR AS MAY BE PROVIDED IN A WRITTEN NON-DISCLOSURE AGREEMENT BETWEEN THE PARTIES.

CAD GENERATED DRAWING			
TOLERANCES UNLESS OTHERWISE SPECIFIED:	NAME	DATE	
X.XX ± 0.010"	DRAWN	MRP	5/11/2021
X.XXX ± 0.005"	CHECKED	.	.
ANGULAR ± 1°	ENG APPR.	MRP	5/11/2021
MACHINED SURFACES ⁶³	MFG APPR.	.	.
INTERPRET GEOMETRIC TOLERANCES PER: ASME Y14.5M-1994	Q.A.	.	.
MATERIAL:	SIZE	DWG NO.	
SEE PART DETAIL	B	426C-DS	
FINISH:	CAGE CODE:	3E7U8	SCALE 1:1
SEE FINISH TABLE	MODEL_INFO:	426C Series Master	REV 21A
DO NOT SCALE DRAWING			SHEET 1 OF 2

WAKEFIELD THERMAL
 2910 INDUSTRIAL DRIVE, RALEIGH, NC 27609

TITLE:
426C WEDGELOCK DATASHEET
 0.260 X 0.250

8 7 6 5 4 3 2 1




[LLL] LENGTH TABLE		
ASSY LENGTH [LLL]	[H] MTG X	[C] OPITON X/2
280	0.900	0.450
330	1.400	0.700
380	1.900	0.950
430	2.400	1.200
480	2.900	1.450
530	3.400	1.700
580	3.900	1.950
630	4.400	2.200
680	4.900	2.450
730	5.400	2.700
780	5.900	2.950
OTHER LENGTHS AVAILABLE UPON REQUEST		

[H] MOUNTING TABLE	
DASH NO	DESCRIPTION
A	NO MOUNTING HOLES
\triangle R	ϕ 0.068/0.073 THRU \checkmark ϕ 0.213 X 100°
T	#0-80 UNF-2B THREADS
S	#2-56 UNC-2B THREADS
U	M2 X 0.4 - 6H THREADS
M	M2.5 X 0.45 - 6H THREADS
THREAD DEPTH .215	


[F] FINISH TABLE	
DASH NO	DESCRIPTION
A	NO FINISH
G	CHROMATE PER MIL-DTL-5541, CLASS 1A, TYPE I (GOLD)
T	TRIVALENT CHROMATE PER MIL-DTL-5541, CLASS 1A, TYPE II (CLEAR), RoHS COMPLIANT
B	BLACK ANODIZE PER MIL-A-8625, TYPE II, CLASS 2
H	HARD BLACK ANODIZE PER MIL-A-8625, TYPE III, CLASS 2
D	HARD BLACK ANODIZE PER MIL-A-8625, TYPE III, CLASS 2 WITH DRY FILM LUBE PER MIL-L-46010
E	ELECTROLESS NICKEL PER MIL-C-26074, CLASS 4, GRADE B, BRIGHT
*N	NADCAP COMPLIANT (EX: 'BN' - BLACK ANODIZE, NADCAP)

EXAMPLE
 426C-480SSB-CKP
 426C WEDGELock ASSEMBLY
 4.80" LENGTH, 2-56 MTG, 3/32 SOCKET HEAD, BLACK ANODIZE
 CENTER MTG HOLE, CAPTIVE SCREW, LOCK PATCH


PART NUMBER CODE
 426C-[LLL][H][D][F]-[C][K][P][V]

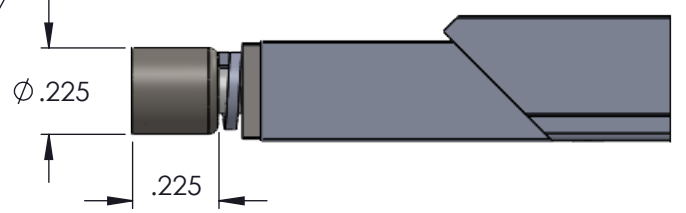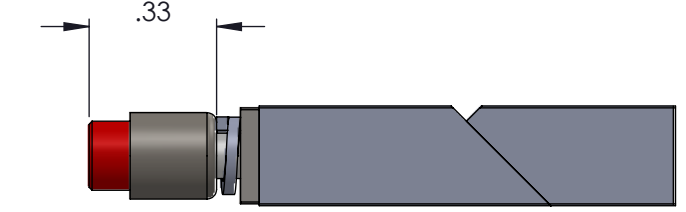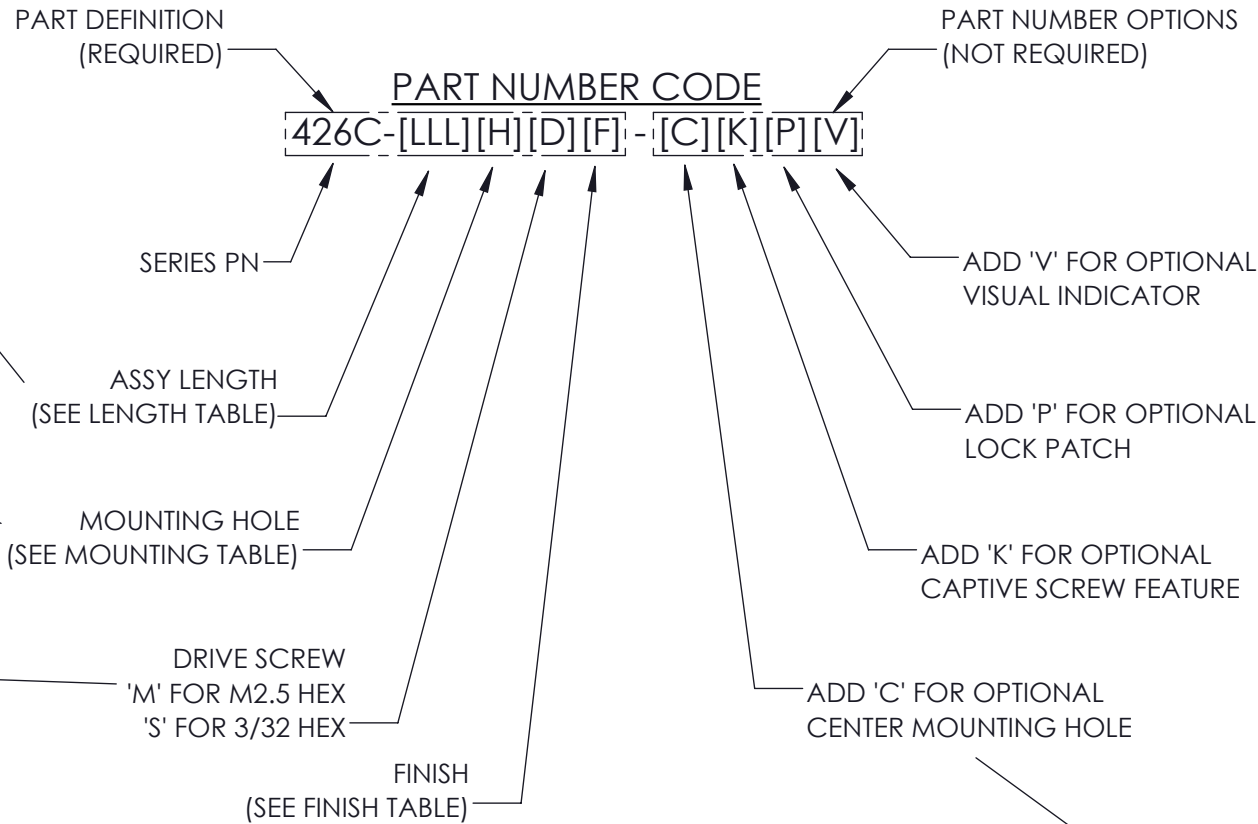


'V' OPTION
 VISUALLY CONFIRMS LOCKED IN PLACE WHEN RED SCREW HEAD IS CONCEALED

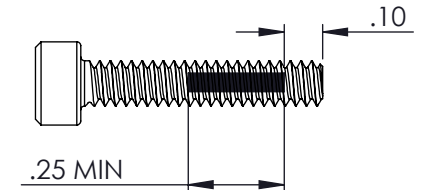

'P' OPTION
 NYLON PATCH PER MIL-F-18240 PROVIDES ADDITIONAL RESISTANCE TO SHOCK AND VIBRATION

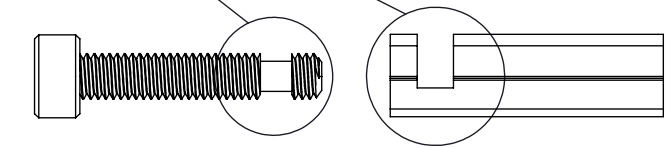

'K' OPTION
 CAPTIVATES SCREW BY FREE SPINNING WHEN WEDGELock IS IN RELAXED POSITION

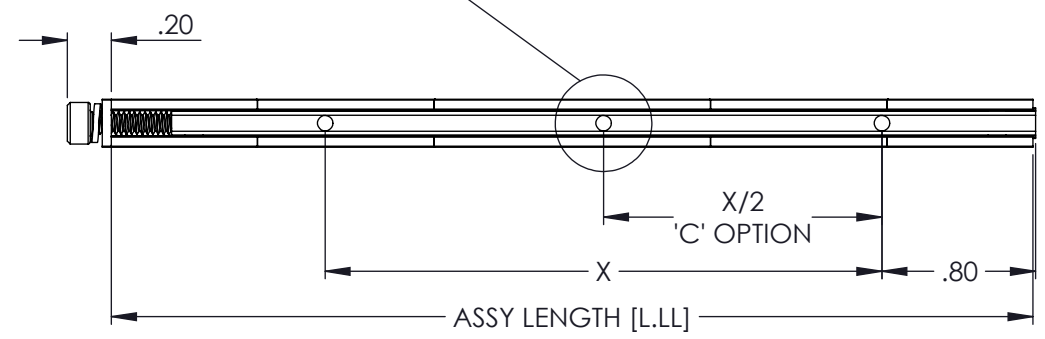

BOTTOM VIEW

NOTES:
 \triangle SHIP AS COMPLETE ASSEMBLY IN RELAXED STATE
 (IF RIVET MOUNTING OPTION IS SELECTED, SHIP UNASSEMBLED)

THIS DOCUMENT, IN ITS ENTIRETY, CONTAINS INFORMATION WHICH IS CONFIDENTIAL AND PROPRIETARY TO WAKEFIELD THERMAL. DOCUMENTS MARKED WITH PROPRIETARY ARE NOT TO BE USED, DUPLICATED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION OF AN OFFICER OR DULY AUTHORIZED REPRESENTATIVE OF WAKEFIELD THERMAL OR AS MAY BE PROVIDED IN A WRITTEN NON-DISCLOSURE AGREEMENT BETWEEN THE PARTIES.

SIZE	DWG NO.	REV
B	426C-DS	21A
CAGE CODE:	SCALE 1:1	SHEET 2 OF 2
3E7U8		

MODEL_INFO:
 426C Series Master